

MISURE FLANGE E STELI PER ACCOPIAMENTO A COMANDI SECONDO ISO 5211
FLANGES AND STEMS MEASURES FOR CONNECTION TO ACTUATORS ISO 5211 TABLE


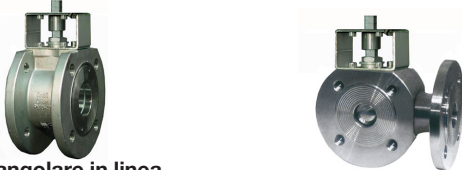
VALVOLE A SFERA Fig. 191 ES F - 1913 <i>BALL VALVES</i>			Fig. 194 - 196 + Bracket		
					
Perno quadro a 45°			Perno rettangolare in linea		
DN	ISO 5211	Quadro (mm)	ISO 5211	Quadro x alt. (mm)	
1/2"	15	F 04	9	F 03	10 x 6
3/4"	20	F 04	9	F 03	12 x 8
1"	25	F 05	11	F 03	12 x 8
1.1/4"	32	F 05	11	F 03	12 x 8
1.1/2"	40	F 07	14	F 05	16 x 10
2"	50	F 07	14	F 05	16 x 10
2.1/2"	65	--	--	F 07	22 x 14
3"	80	--	--	F 07	22 x 14
4"	100	--	--	--	--

Tabella forature ISO 5211 a pag. V 7 - TABLE ISO 5211 SEE TO PAG. V 7

PREDISPOSIZIONE PER ACCOPPIAMENTO ISO 5211 SU ATTUATORI
PREPARING FOR ISO 5211 CONNECTION TO ACTUATORS




ATTUATORE PNEUMATICO UT <i>PNEUMATIC ACTUATOR UT TYPE</i>			ATTUATORE ELETTRICO OM IP67 <i>ELECTRIC ACTUATOR OM TYPE</i>			ATTUATORE ELETTRICO OAX IP68 <i>ELECTRIC ACTUATOR OAX TYPE</i>		
								
Type	ISO 5211	Stellato x quadro (mm)	Type	ISO 5211	Stellato x quadro (mm)	Type	ISO 5211	Stellato x quadro (mm)
UT 15	F 05	14	OM 35	F03-05-07	14	OAX 30	F 03-04-05	11
UT 20	F 07	17	OM 70	F03-05-07	14	OAX 50	F 05-07	14
UT 25	F 07	17	OM130	F05-07-10	17	OAX 80	F 05-07	14
UT 30	F 07	17	OM240	F05-07-10	22	OAX 100	F 07-10	17
UT 35	F 10	22						
UT 40	F 10	22						
UT 45	F 10	22						
UT 50	F 12	27						
UT 55	F 12	27						
UT 60	F 14	36						
UT 65	F 14	36						

Tabella forature ISO 5211 a pag. V 7 - TABLE ISO 5211 SEE TO PAG. V 7